

CRHT102 Series

High Temperature Cable Reduction Box, Fiberglass



VIBRATION ANALYSIS HARDWARE




Product Features

Reduce Cable Clutter in High Temperature Areas

Ideal solution for consolidating cables & reducing costs

- ▶ Can accept 12 or 16 individual signal cables
- ▶ Can reduce cable costs by as much as 75%
- ▶ Reduce up to 16 individual cables to one multi-conductor cable

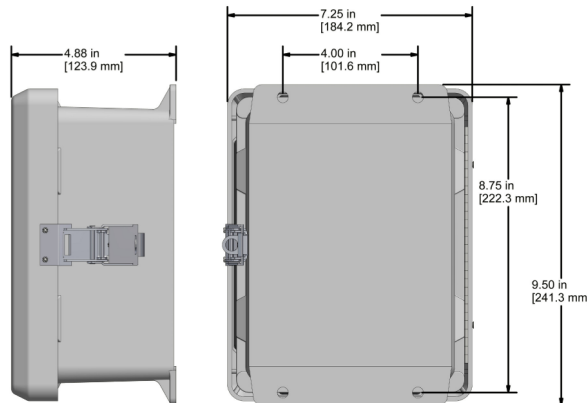

Specifications

Temperature Range	-40°F to 212°F (-40°C to 100°C)
Enclosure Material	Fiberglass
Inputs	Terminal Block 3 Inputs per Channel (+, -, Shield)
Outputs	Terminal Block 3 Inputs per Channel (+, -, Shield)
Channel Options	12 or 16 Channels
Rating	NEMA 4X (IP66)
Door Closure	Snap Latch
Dimensions	7.72 x 9.61 x 4.61 in (196 x 244 x 117 mm)
Resistance	Resistant to Hose Directed Fluid and Corrosion

Ordering Information

CRHT -

Enclosure Type	Channels	Input Options
102 - Fiberglass Enclosure 202 - Stainless Steel Enclosure	12 - 12 Channels 16 - 16 Channels	A - User Defined* B - Conduit Fitting** C - Cord Grips S - Stainless Steel Cord Grips*

*No punch outs are provided in the enclosure for cable entry. User may install any fitting required.
**For use with conduit.
*Stainless steel enclosure only.

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900