

AC118 Series

Multi-Purpose Accelerometer, Side Exit Connector / Cable, 50 mV/g



VIBRATION ANALYSIS HARDWARE



Product Features


50 mV/g General Purpose Side Exit Sensor
Excellent for Higher g Applications

- ▶ ±100 g, Dynamic Range
- ▶ 50 mV/g, ±10% Sensitivity
- ▶ 1,0-10000 Hz (60-600,000 CPM)

AC118-1A	AC118-2C	AC118-3C	AC118-6C																														
2 Pin Connector	CB103 Integral Cable	CB206 Armored Integral Cable	CB611 Heavy Duty Armored Integral Cable																														
<table border="1"> <tr><th>Connector Pin</th><th>Polarity</th></tr> <tr><td>A</td><td>(+) Signal/Power</td></tr> <tr><td>B</td><td>(-) Common</td></tr> </table>	Connector Pin	Polarity	A	(+) Signal/Power	B	(-) Common	<table border="1"> <tr><th>Conductor</th><th>Polarity</th></tr> <tr><td>Red</td><td>(+) Signal/Power</td></tr> <tr><td>Black</td><td>(-) Common</td></tr> <tr><td>Shield</td><td>Cable Drain Wire</td></tr> </table>	Conductor	Polarity	Red	(+) Signal/Power	Black	(-) Common	Shield	Cable Drain Wire	<table border="1"> <tr><th>Conductor</th><th>Polarity</th></tr> <tr><td>Red</td><td>(+) Signal/Power</td></tr> <tr><td>Black</td><td>(-) Common</td></tr> <tr><td>Shield</td><td>Cable Drain Wire</td></tr> </table>	Conductor	Polarity	Red	(+) Signal/Power	Black	(-) Common	Shield	Cable Drain Wire	<table border="1"> <tr><th>Conductor</th><th>Polarity</th></tr> <tr><td>Red</td><td>(+) Signal/Power</td></tr> <tr><td>Black</td><td>(-) Common</td></tr> <tr><td>Shield</td><td>Cable Drain Wire</td></tr> </table>	Conductor	Polarity	Red	(+) Signal/Power	Black	(-) Common	Shield	Cable Drain Wire
Connector Pin	Polarity																																
A	(+) Signal/Power																																
B	(-) Common																																
Conductor	Polarity																																
Red	(+) Signal/Power																																
Black	(-) Common																																
Shield	Cable Drain Wire																																
Conductor	Polarity																																
Red	(+) Signal/Power																																
Black	(-) Common																																
Shield	Cable Drain Wire																																
Conductor	Polarity																																
Red	(+) Signal/Power																																
Black	(-) Common																																
Shield	Cable Drain Wire																																
Stock Product	Built To Order	Built To Order	Built To Order																														

Specifications	Standard	Metric	Specifications	Standard	Metric
Part Number	AC118	M/AC118	Environmental		
Sensitivity (±10%)	50 mV/g		Temperature Range	-58 to 250°F	-50 to 121 °C
Frequency Response (±3dB)	60-600,000 CPM	1,0-10000 Hz	Maximum Shock Protection	5,000 g, peak	
Frequency Response (±10%)	240-360,000 CPM	4,0-6000 Hz	Electromagnetic Sensitivity	CE	
Dynamic Range	± 100 g, peak		Sealing	Welded, Hermetic	
Electrical			Submersible Depth	200 ft.	60 m
Settling Time	<2 Seconds		Physical		
Voltage Source (IEPE)	18-30 VDC		Sensing Element	PZT Ceramic	
Constant Current Excitation	2-10 mA		Sensing Structure	Shear Mode	
Spectral Noise @ 10 Hz	8 µg/√Hz		Weight	5.1 oz	145 grams
Spectral Noise @ 100 Hz	2.5 µg/√Hz		Case Material	316L Stainless Steel	
Spectral Noise @ 1000 Hz	1.7 µg/√Hz		Mounting	1/4-28	
Output Impedance	<100 ohm		Connector (Non-Integral)	2 Pin MIL-C-5015	
Bias Output Voltage	10-14 VDC		Resonant Frequency	1,260,000 CPM	21000 Hz
Case Isolation	>10 ⁹ ohm		Mounting Torque	2 to 5 ft. lbs.	2,7 to 6,8 Nm
			Mounting Hardware	1/4-28 Captive Bolt	M6x1 Captive Bolt
			Calibration Certificate	CA10	

Typical Frequency Response

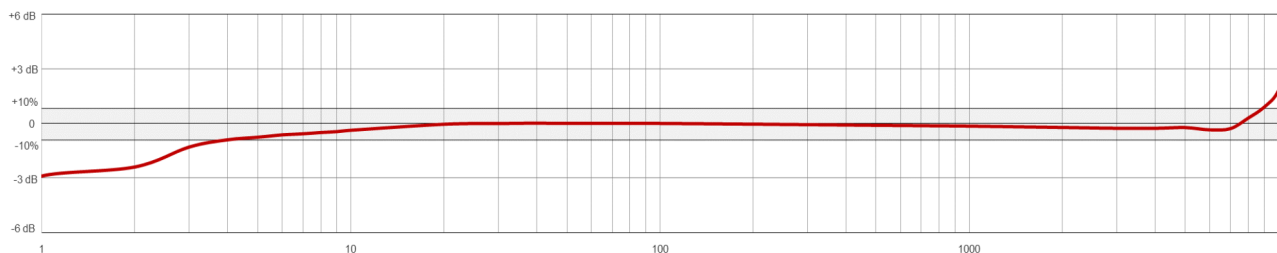

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900