

# XE250 5 to 8 Channels

1 - 8 Channel SC200 Series Signal Conditioner Stainless Steel Enclosure



PROTECTION & RELIABILITY INSTRUMENTS




## Product Features

Accommodates up to 8 SC200 Series Signal Conditioners

Signal conditioners sold separately


- ▶ Constant 4-20 mA Signals along with available dynamic signal via BNC jack or screw terminals
- ▶ Constant 4-20 mA Signals with available dynamic signal via BNC jack or screw terminals
- ▶ Includes internal DC Power Supply with 100-VAC Input

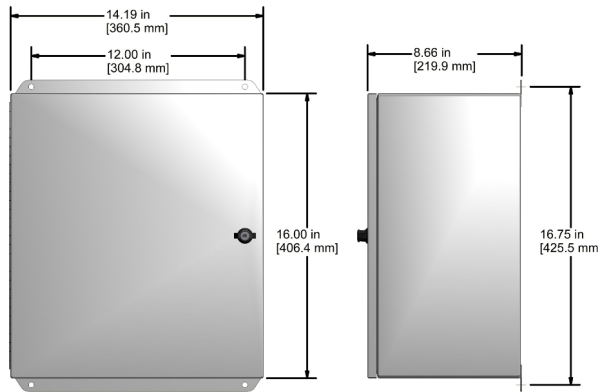

## Specifications

Temperature Range	15°F (-10°C) to 140°F (60°C)
Enclosure Material	Stainless Steel
Power	100-240 VAC
Inputs	Vibration Input: 1 Input/channel
Channel Options	1 - 8 Channels
Rating	NEMA 4X (IP66)
Door Closure	Twist Latch
Dimensions	14.19 x 16.75 x 8.66 in (360.5 x 425.5 x 220 mm)
Resistance	Resistant to Hose Directed Fluid and Corrosion

## Ordering Information

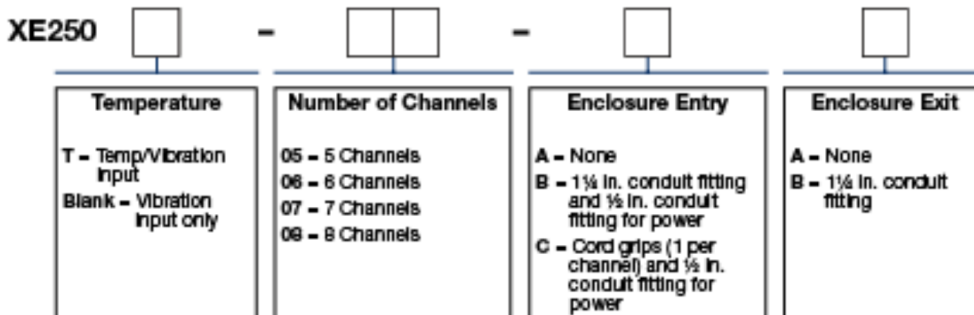

Lifetime Warranty on Materials & Workmanship

www.ctconline.com | sales@ctconline.com | 585-924-5900