


XE450 1 to 4 Channels

SC200 series signal conditioner box, NEMA 4X stainless steel enclosure, DC voltage output, with power



PROTECTION & RELIABILITY INSTRUMENTS

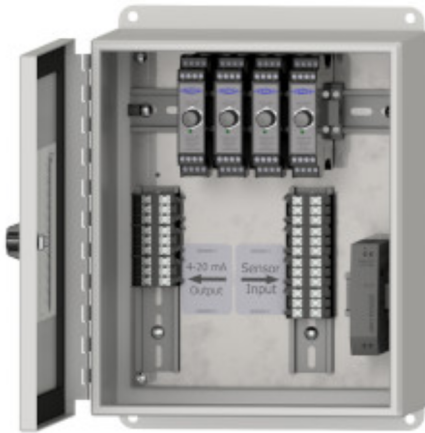


Product Features

Accommodates up to 4 SC200 Series Signal Conditioners

Signal conditioners sold separately


- ▶ Provides VDC Signals along with dynamic outputs, from remote installed accelerometers to PLC/DCS systems and portable data collectors
- ▶ Constant DC Voltage with available dynamic signal via BNC jack or screw terminals
- ▶ Includes internal DC Power Supply with 100-~~V~~AC Input

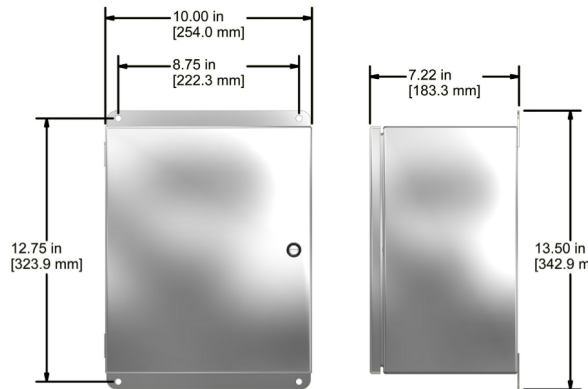

Specifications

Temperature Range	15°F (-10°C) to 140°F (60°C)
Enclosure Material	Stainless Steel
Power	100-240 VAC
Inputs	Vibration Input: 1 Input/channel
Channel Options	1-4 Channels
Rating	NEMA 4X
Door Closure	Twist Latch
Dimensions	10.00 x 13.50 x 7.24 in (254 x 343 x 184 mm)
Resistance	Resistant to Hose Directed Fluid and Corrosion

Ordering Information

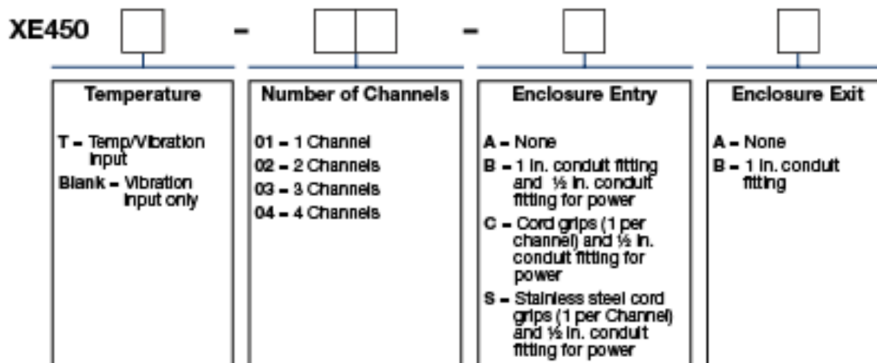

Lifetime Warranty on Materials & Workmanship

www.ctconline.com | sales@ctconline.com | 585-924-5900