

XE450T 5 to 8 Channels



PROTECTION & RELIABILITY INSTRUMENTS

SC200 series signal conditioner box including temperature, NEMA 4X stainless steel enclosure, DC voltage output, with power




Product Features

Accommodates up to 8 SC200 Series Signal Conditioners

Signal conditioners sold separately


- ▶ Provides VDC Signals along with dynamic outputs, from remote installed accelerometers to PLC/DCS systems and portable data collectors
- ▶ Constant DC Voltage with available dynamic signal via BNC jack or screw terminals
- ▶ Includes internal DC Power Supply with 100-VAC Input

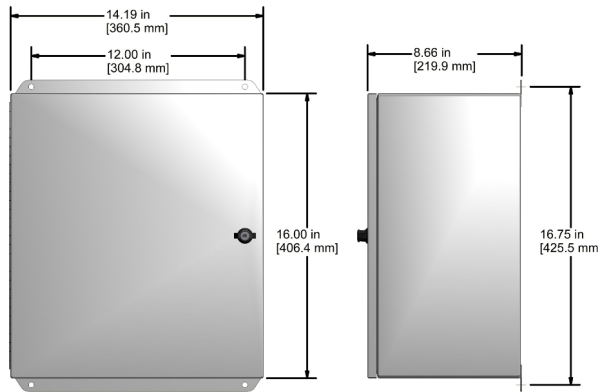

Specifications

Temperature Range	15° to 140°F (-10° to 60°C)
Enclosure Material	Stainless Steel
Power	100-240 VAC
Inputs	Vibration Input: 1 Input/channel Dual Temp/Vib: 2 Inputs/channel (CTC TA Series only)
Channel Options	5 - 8 Channels
Rating	NEMA 4X
Door Closure	Twist Latch
Dimensions	14.19 x 16.75 x 8.66 in (360.5 x 425.5 x 220 mm)
Resistance	Resistant to Hose Directed Fluid and Corrosion

Ordering Information

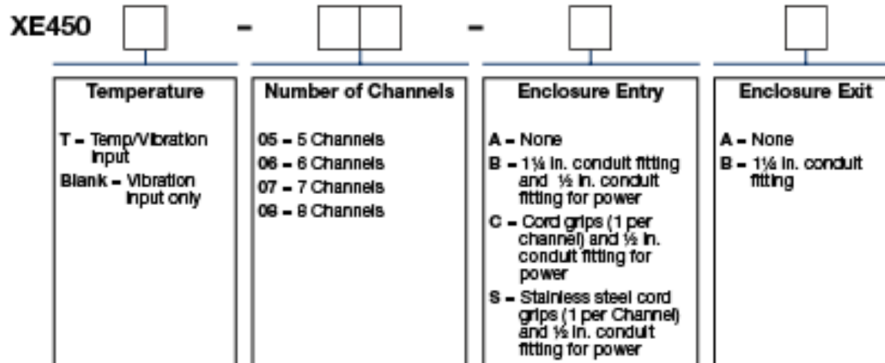

Lifetime Warranty on Materials & Workmanship

www.ctconline.com | sales@ctconline.com | 585-924-5900